

Safe Certificate-Based Maneuvers for Teams of Quadrotors Using Differential Flatness *

Li Wang, Aaron D. Ames, and Magnus Egerstedt[†]

Abstract—*Safety Barrier Certificates* that ensure collision-free maneuvers for teams of differential flatness-based quadrotors are presented in this paper. Synthesized with control barrier functions, the certificates are used to modify the nominal trajectory in a minimally invasive way to avoid collisions. The proposed collision avoidance strategy complements existing flight control and planning algorithms by providing trajectory modifications with provable safety guarantees. The effectiveness of this strategy is supported both by the theoretical results and experimental validation on a team of five quadrotors.

I. INTRODUCTION

Due to recent advances in the design, control, and sensing technology, teams of quadrotors have become widely used in aerial robotic platforms, e.g., [6], [11]. Their ability to hover and fly agilely in three dimensional space makes quadrotors effective tools for surveillance, delivery, precision agriculture, search and rescue tasks, see e.g., [22]. When teams of quadrotors are deployed to collaboratively fulfil these higher level tasks, it is crucial to make sure that they do not collide with each other. The focus of this paper is to rectify the nominal flight trajectory, which is generated with existing control and planning algorithms for teams of quadrotors, in a minimally invasive way to avoid collisions.

Because of the under-actuated and intrinsically unstable nature of quadrotors, it is often challenging to generate safe trajectories for arbitrary tasks. An artificial potential field approach was used in [9] to avoid inter-quadrotor collisions, which relies on a linearized quadrotor model, i.e., near the hovering state. Additionally, real-time trajectory generation approach, utilizing the nonlinear dynamics together with time-optimal planning algorithm, was proposed in [6]. However, it is computationally expensive to accommodate collision avoidance constraints when solving optimal control problems in real time. One remedy to this problem is to exploit the differential flatness property of quadrotors, as introduced in [11], [23], to simplify the trajectory planning process, while still leveraging the nonlinear dynamics of the quadrotors. This property has been successfully used for flight trajectory planning in cluttered environments [10], as well as avoiding static and moving obstacles [12].

*The work by the first and third authors was sponsored by Grant No. 1544332 from the U.S. National Science Foundation, and the work of the second author was sponsored by Grant No. 1239055 from the U.S. National Science Foundation.

[†]Li Wang and Magnus Egerstedt are with the School of Electrical and Computer Engineering, Georgia Institute of Technology, Atlanta, GA 30332, USA (email: {liwang, magnus}@gatech.edu).

Aaron D. Ames is with the Department of Mechanical and Civil Engineering, California Institute of Technology, Pasadena, CA 91125, USA (email: ames@caltech.edu).

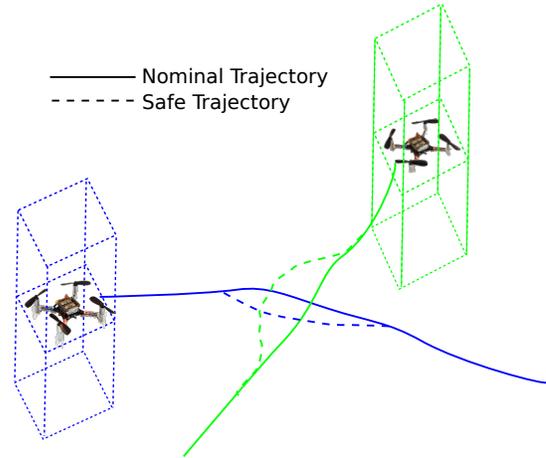


Fig. 1: Safe certificate-based flight maneuvers. The nominal trajectories generated with existing planning algorithms are modified by the safety barrier certificates to avoid collisions. The safe regions of quadrotors are modelled as rectangles to avoid both collisions and air flow disturbances.

In contrast to the aforementioned methods, the goal of this paper is to modify the trajectories in a provably safe manner that is compatible with existing control and planning techniques, while exploiting the nonlinear dynamics (allowing significant deviation from hovering state and large Euler angles) of teams of quadrotors. To achieve this objective, all collision-free states of the quadrotors are encoded in a safe set. Then, *Safety Barrier Certificates* are synthesized based on the differential flatness property, and a class of non-conservative control barrier functions [2], [21], [14] are used to ensure the forward invariance of the safe set. Control barrier functions were used in [19], [20] to avoid static/moving obstacles for a single planar or 3D quadrotor. And *Safety Barrier Certificates* have been applied to teams of ground mobile robots as well for collision avoidance [17], [16]. As such, in this paper, the certificates are extended to more complicated multi-quadrotor systems.

The main contributions of this paper are threefold: 1) *Safety Barrier Certificates* are developed to provably ensure the safety of differential flatness based teams of quadrotors; 2) a strategy is developed to modify the nominal trajectory in a minimally invasive way to avoid collisions, which is compatible with existing flight control and planning algorithms; 3) the feasibility of the proposed method is demonstrated through experimental implementation of the *Safety Barrier Certificates* on a team of five palm-sized quadrotors.

The rest of the paper is organized as follows: differential flatness and exponential control barrier functions are revisited in Sections II and III. The *Safety Barrier Certificates* are presented in Section IV. In Section V, feasibility of the certificates and actuator limits are addressed. The experimental work and conclusions are in Sections VI and VII.

II. DIFFERENTIAL FLATNESS OF QUADROTOR DYNAMICS

The quadrotor is a well-modelled dynamical system with forces and torques generated by four propellers and gravity. $Z-Y-X$ Euler angles conventions are used to define the roll (ϕ), pitch (θ), and yaw (ψ) angles between the quadrotor body frame and the world coordinate frame. The relevant coordinate frames and Euler angles are illustrated in Fig. 2.

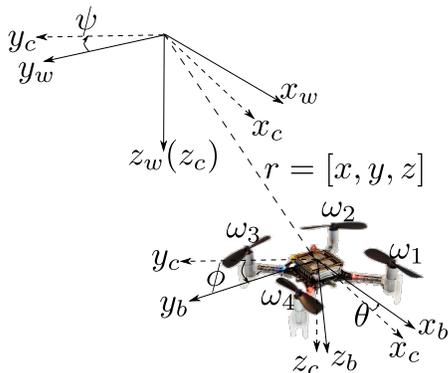


Fig. 2: Quadrotor coordinate frames. The subscripts w denotes the world frame F_w , b for the quadrotor body frame F_b , and c for an intermediate frame F_c after yaw angle rotation. ω_1 to ω_4 are the angular velocities of the four propellers. The palm-sized quadrotor illustrated is a Crazyflie 2.0 [1] used in the experiment section.

Assuming that the damping and drag-like effects are negligible [6], the dynamics of a quadrotor is governed by the Newton-Euler equation,

$$\begin{aligned} m\ddot{r} &= mgz_w + f_z z_b, \\ J\dot{\omega}_b &= \tau - \omega_b \times J\omega_b, \end{aligned}$$

where $r = [x, y, z]^T$ is the position of the center of mass in the world frame F_w , $\omega_b = [p, q, r]^T$ is the angular velocity in the body frame F_b , and m and J are the mass and inertia matrix of the quadrotor respectively. f_z is the total thrust and $\tau = [\tau_x, \tau_y, \tau_z]$ is the torque generated by the motors. z_w and z_b are the unit vectors in the Z -direction in the world and body frames, respectively.

The quadrotor dynamics has been shown to be differentially flat in [11], [23], i.e., the states and inputs of the system can be written in terms of algebraic functions of appropriately chosen flat outputs and their derivatives.

As shown in [23], the flat output for quadrotor can be chosen as $\sigma = [x, y, z, \psi]^T$. The full state $\xi = [x, y, z, v_x, v_y, v_z, \psi, \theta, \phi, p, q, r]^T$ and input $\mu = [f_z, \tau_x, \tau_y, \tau_z]^T$ of the system can be represented algebraically using the

following functions

$$\begin{aligned} \xi &= \beta(\sigma, \dot{\sigma}, \ddot{\sigma}, \ddot{\sigma}), \\ \mu &= \gamma(\sigma, \dot{\sigma}, \ddot{\sigma}, \ddot{\sigma}, \ddot{\sigma}), \end{aligned}$$

where we refer to [23] for a detailed derivation and formula of the so-called endogenous transformation (β, γ).

Switching from [23] to this paper, in order to generate four times differentiable flight trajectory, a virtual control input $v \in \mathbb{R}^3$ is created for the integrator dynamics¹. For simplicity of planning, the yaw angle is always set to zero ($\psi(t) = 0$),

$$\ddot{r} = v, \quad (1)$$

where $r = \sigma_{1:3} = [x, y, z]^T \in \mathbb{R}^3$. The integrator system can be equivalently written as state space form

$$\dot{q} = \underbrace{\begin{bmatrix} 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 \end{bmatrix}}_{f(q)} \otimes I_{3 \times 3} \cdot q + \underbrace{\begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}}_{g(q)} \otimes I_{3 \times 3} \cdot v, \quad (2)$$

where $q = [r^T, \dot{r}^T, \ddot{r}^T, \ddot{r}^T]^T \in \mathbb{R}^{12}$, \otimes is Kronecker product. Note that since collision avoidance requires simultaneous response of three degrees of freedom, the trajectory planning problem here can not be simplified by decoupling three independent degrees of freedom, as was done in [11], [6].

III. EXPONENTIAL CONTROL BARRIER FUNCTIONS

With the simplified forth-order integrator model for quadrotors introduced in Section II, Control Barrier Functions (CBF) can be used to ensure collision-free flight maneuvers. CBFs are Lyapunov-like functions, which can be used to provably guarantee the forward invariance of a desired set. When collision-free maneuvers are encoded as a safe set, CBFs can then be used to ensure that quadrotors never escape from the safe set, i.e., they never collide. A class of non-conservative CBFs [2], [21], which allow the state to grow inside the safe set as opposed to strictly non-increasing, is adopted to synthesize the *Safety Barrier Certificates*. Consequently, quadrotor flight controllers are provided with more freedom to excise desire maneuvers while remaining safe.

Let the safe set of quadrotor states be defined as

$$\mathcal{C}_0 = \{q \in \mathbb{R}^{12} \mid h(q) \geq 0\}, \quad (3)$$

where $h: \mathbb{R}^{12} \rightarrow \mathbb{R}$ is a smooth function.

Position based safety constraints, i.e., constraints defined over r , are of particular interest for the quadrotor system (2), so that the quadrotor does not collide with static or moving obstacles. With a slight abuse of notation, we denote $y_0(r) = h(q)$ as the output of the system, where $h(q)$ only contains

¹Note that the trajectory generated with the integrator dynamics (1) is not necessarily four times differentiable. In addition, the virtual control input $v \in \mathbb{R}^3$ needs to be Lipschitz continuous for the forth derivative to exist [8], which will be shown in Section IV.

the position variable r . Because the virtual control input v is the fourth derivative of the position variable r , the relative degree of $y_0(r)$ is 4, which means that

$$y_0^{(4)}(r) = L_f^4 h(q) + L_g L_f^3 h(q) v, \quad (4)$$

where the Lie derivative formulation stands for

$$\dot{h}(q) = \frac{\partial h(q)}{\partial q} (f(q) + g(q)v) = L_f h(q) + L_g h(q)v.$$

Note that due to the high relative degree of $y(r)$, CBFs in [2], [21] can not be directly applied here. A variation called Exponential Control Barrier Function (ECBF) [14] can however be leveraged to ensure the forward invariance of \mathcal{C}_0 .

Definition III.1: Given the dynamical system (2) and a set \mathcal{C}_0 defined in (3), the smooth function $h: \mathcal{C}_0 \rightarrow \mathbb{R}$ with relative degree of 4 is an Exponential Control Barrier Function (ECBF) if there exists a vector $K \in \mathbb{R}^{1 \times 4}$ such that $\forall x \in \mathcal{C}_0$,

$$\sup_{u \in U} [L_f^4 h(q) + L_g L_f^3 h(q)v + K\eta] \geq 0, \quad (5)$$

and $h(q(t)) \geq Ce^{F-GK}\eta(q_0) \geq 0$ when $h(q_0) \geq 0$, where $\eta = [h(q), L_f h(q), L_f^2 h(q), L_f^3 h(q)]^T$, $C = [1, 0, 0, 0]$.

The eligible vector K can be obtained by placing the poles of the closed-loop matrix $(F - GK)$ at $p = -[p_1, p_2, \dots, p_4]^T$, where $p_i > 0$ for $i = 1, 2, 3, 4$. With these pole locations, a family of outputs $y_i, i = 1, 2, 3, 4$ can be defined as

$$y_i = \left(\frac{d}{dt} + p_1\right) \circ \left(\frac{d}{dt} + p_2\right) \circ \dots \circ \left(\frac{d}{dt} + p_i\right) \circ h(q),$$

with $y_0 = h(q)$, and the associated family of super level sets

$$\mathcal{C}_i = \{q \in \mathbb{R}^{12} \mid y_i(q) \geq 0\}. \quad (6)$$

Theorem 3.1: Given a safe set \mathcal{C}_0 in (3) and associated ECBF $h(q): \mathcal{C}_0 \rightarrow \mathbb{R}$, with initially $q_0 \in \mathcal{C}_i, i = 0, 1, 2, 3$ for system (2), any Lipschitz continuous controller $v(q) \in K_v(q)$ renders \mathcal{C}_0 forward invariant, where

$$K_v(q) = \{v \in V \mid L_f^4 h(q) + L_g L_f^3 h(q)v + K_v \eta \geq 0\},$$

and $\eta = [h(q), L_f h(q), L_f^2 h(q), L_f^3 h(q)]^T$.

We refer to [14] for the detailed proof of general cases of this theorem. The basic idea is to design a stabilizing controller for the system using pole placement, then use Comparison Lemma [8] to show recursively that $\mathcal{C}_i, i = 0, 1, 2, 3$, is forward invariant.

IV. SAFETY BARRIER CERTIFICATES FOR TEAMS OF QUADROTORS

Two of the main tools, i.e., differential flatness property of quadrotor and ECBF for a single quadrotor, for constructing *Safety Barrier Certificates* have been revisited in sections II and III. This section focuses on assembling *Safety Barrier Certificates* for teams of quadrotors utilizing these tools.

A. Safety Region Modelled With Super-ellipsoids

Consider a team of quadrotors indexed by $\mathcal{M} = \{1, 2, 3, \dots, m\}$, the dynamics of quadrotors are modelled as fourth-order integrators with virtual inputs $v_i \in \mathbb{R}^3$,

$$\ddot{r}_i = v_i, \quad i \in \mathcal{M} \quad (7)$$

where $r_i = [x_i, y_i, z_i]^T$ is the position of the center of mass of quadrotor i . The full state of quadrotor i is represented by $q_i = [r_i^T, \dot{r}_i^T, \ddot{r}_i^T, \dddot{r}_i^T]^T \in \mathbb{R}^{12}$. Let $r = [r_1^T, r_2^T, \dots, r_m^T]^T \in \mathbb{R}^{3m}$ and $v = [v_1^T, v_2^T, \dots, v_m^T]^T \in \mathbb{R}^{3m}$ denote the aggregate position and virtual control of the team of quadrotors.

In order to ensure the safety of the team of quadrotors, *all* pairwise collisions between quadrotors need to be avoided. In addition, quadrotors can not fly directly over each other due to the air flow disturbance generated by propellers as illustrated in Fig. 1. During actual flights, the bottom quadrotor generally goes unstable or even crash due to the strong wind blowing from above.

To accommodate these safety requirements, each quadrotor is encapsulated with a ‘rectangle shape’ super-ellipsoid². Considering any pair of quadrotors (i, j) , the pairwise safe set is defined as

$$\mathcal{C}_{ij} = \{(q_i, q_j) \mid h_{ij}(q_i, q_j) \geq 0\}, \quad (8)$$

$$h_{ij}(q_i, q_j) = (x_i - x_j)^4 + (y_i - y_j)^4 + \left(\frac{z_i - z_j}{c}\right)^4 - D_s^4,$$

where D_s is the safety distance, c is the scaling factor along the Z axis caused by air flow disturbance. In practice, c is obtained by flying two quadrotors over each other and identify the critical separation distance at which the bottom quadrotor goes unstable. Two quadrotors are considered safe when two ‘rectangle shape’ super-ellipsoids do not intersect with each other as shown in Fig. 3.

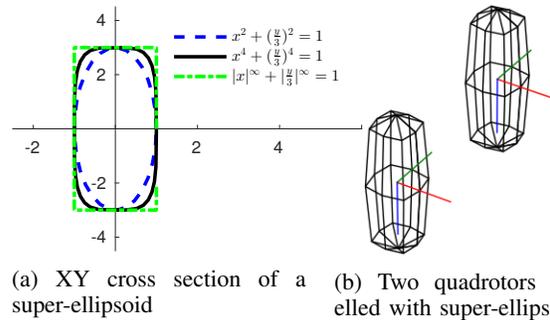


Fig. 3: Safe regions of quadrotors modelled with super-ellipsoids.

Note that a ‘rectangle shape’ super-ellipsoid is chosen to appropriately approximate the safe region, since the yaw angle of quadrotors is trivially set to $\psi = 0$ and quadrotors are flying with ‘X’ configuration³. Alternatively, a ‘cylinder

²A super-ellipsoid is a solid geometry generally defined with the implicit function $[(\frac{x}{a})^r + (\frac{y}{b})^r]^{\frac{n}{r}} + (\frac{z}{c})^n \leq 1$ with $r, n \in \mathbb{R}^+$ [3]. $r = n = 4$ is selected to approximate a ‘rectangle shape’ here.

³‘X’ configuration is when the quadrotor is configured with two propellers facing forward as shown in Fig. 2. ‘X’ configuration is often favored due to improved flight agility and onboard camera view clearance.

shape' super-ellipsoid can be picked for arbitrary yaw angles,

$$\tilde{h}_{ij}(q_i, q_j) = [(x_i - x_j)^2 + (y_i - y_j)^2]^{\frac{n}{2}} + \left(\frac{z_i - z_j}{c}\right)^n - D_s^n.$$

Since the pairwise safe set \mathcal{C}_{ij} is defined in terms of position variables r_i, r_j , the ECBF candidate $h_{ij}(q_i, q_j)$ has a relative degree of 4. (q_i, q_j) is omitted hereafter for notation convenience. To ensure the forward invariance of \mathcal{C}_{ij} , virtual controls of quadrotor i and j need to satisfy

$$\ddot{\ddot{h}}_{ij} + K \cdot [h_{ij}, \dot{h}_{ij}, \ddot{h}_{ij}, \ddot{\ddot{h}}_{ij}]^T \geq 0, \quad (9)$$

where $\ddot{\ddot{h}}_{ij}$ is affine in v_i, v_j . Thus, the safety barrier constraint (9) can be rearranged into a linear constraint on the virtual control when q_i, q_j are given,

$$A_{ij}(q_i, q_j) \cdot v \leq b_{ij}(q_i, q_j), \quad (10)$$

where $A_{ij}(q_i, q_j) = -[0, \dots, \underbrace{1}_{i\text{th}}, \dots, \underbrace{-1}_{j\text{th}}, \dots, 0] \otimes [4(x_i - x_j)^3, 4(y_i - y_j)^3, 4\left(\frac{z_i - z_j}{c^4}\right)^3] \in \mathbb{R}^{1 \times 3m}$, $b_{ij}(q_i, q_j) = K \cdot [h_{ij}, \dot{h}_{ij}, \ddot{h}_{ij}, \ddot{\ddot{h}}_{ij}]^T + (24\delta^4 + 144\delta \circ \delta^2 \circ \ddot{\delta} + 36\ddot{r}^2 \circ \ddot{\delta}^2 + 48\ddot{r}^2 \circ \delta \circ \ddot{\delta}) \cdot \mathbf{1}_3$, $\delta = [x_i - x_j, y_i - y_j, \frac{z_i - z_j}{c}]$, and \circ stands for elementwise vector product.

The *Safety Barrier Certificates* are formed by assembling all the pairwise safety barrier constraints

$$K_{\text{safe}} = \{v \in \mathbb{R}^{3m} \mid A_{ij}(q_i, q_j) \cdot v \leq b_{ij}(q_i, q_j), \forall i < j, i, j \in \mathcal{M}\}. \quad (11)$$

As long as the virtual control v satisfies the *Safety Barrier Certificates* K_{safe} and corresponding initial conditions, the team of quadrotors is guaranteed to be safe by *Theorem 3.1*.

B. Modifying the Nominal Trajectory with Safety Barrier Certificates

It is often difficult to generate provably collision-free trajectories when planning the nominal trajectory for teams of quadrotors. Instead, we can first plan the flight trajectory without considering collisions, and then modify it using *Safety Barrier Certificates* in a minimally invasive way to avoid collisions. Here we consider the case when a nominal trajectory $\hat{r}(t) = [\hat{r}_1^T(t), \hat{r}_2^T(t), \dots, \hat{r}_m^T(t)] \in C^4$ is provided. For generality, the preplanned nominal trajectory can be generated by any methods, e.g., optimal control approach [6], vector field approach[23], or parametrized curves [11], as long as it is sufficiently smooth, i.e., four times differentiable. This smooth reference trajectory $\hat{r}_i(t)$ is then tracked by a simulated integrator model using a pole placement controller with a simulated time step of 0.02s (simulates the 50Hz flight controller),

$$\hat{v}_i = \ddot{\ddot{\hat{r}}}_i - K \cdot [(r_i - \hat{r}_i), (\dot{r}_i - \dot{\hat{r}}_i), (\ddot{r}_i - \ddot{\hat{r}}_i), (\ddot{\ddot{r}}_i - \ddot{\ddot{\hat{r}}}_i)]^T, \quad (12)$$

where K is picked to be the same as used for ECBFs in (9) to trade-off tracking performance and safety enforcement.

To respect the nominal control \hat{v}_i as much as possible, a quadratic program is used to minimize the difference

between the actual and nominal control,

$$v^* = \underset{v}{\operatorname{argmin}} \quad J(v) = \sum_{i=1}^N \|v_i - \hat{v}_i\|^2$$

$$\text{s.t.} \quad A_{ij}(q_i, q_j)v \leq b_{ij}(q_i, q_j), \quad \forall i < j,$$

$$\|v_i\|_{\infty} \leq \alpha_i, \quad \forall i \in \mathcal{M}, \quad (13)$$

where α_i is a bound on the virtual snap control. It can be observed that the actual controller v_i will be the same as \hat{v}_i , if it is safe. The controller will only be rectified if it violates the *Safety Barrier Certificates*, i.e., if it leads to collisions.

The dynamics of the simulated forth-order integrator system is integrated forward using forward Euler method. Similar to [13], the controller v_i generated by the QP (13) will be Lipschitz continuous. Thus, the rectified collision-free trajectory $r(t)$ will still be four times differentiable. Differential flatness property of quadrotors can still be used to execute the rectified collision-free trajectory $r(t)$.

Although collision avoidance is still done in a centralized manner here, the required numbers of decision variables and constraints are significantly reduced compared with the mixed-integer programming technique [12]. Decentralization of safety certificates is also possible with methods similar to [17], but precise measurements of other quadrotors' motion might be demanded.

V. FEASIBILITY AND PARAMETERIZATION

Section IV provides a systematic approach to modify pre-planned trajectory in a minimally-invasive and smooth way using *Safety Barrier Certificates*. However, it is not clear whether the quadratic program in (13) is always feasible or not. In addition, the generated trajectory might require excessive amount of control effort to execute. This section provides theoretical guarantees and parameterization method to address those issues.

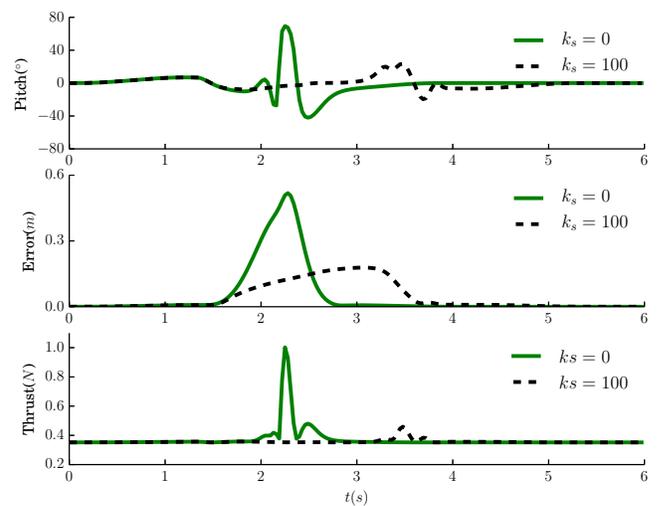


Fig. 4: Comparisons of control efforts for the quadrotor using $(k_s = 100)$ or without using $(k_s = 0)$ virtual vehicle parameterization.

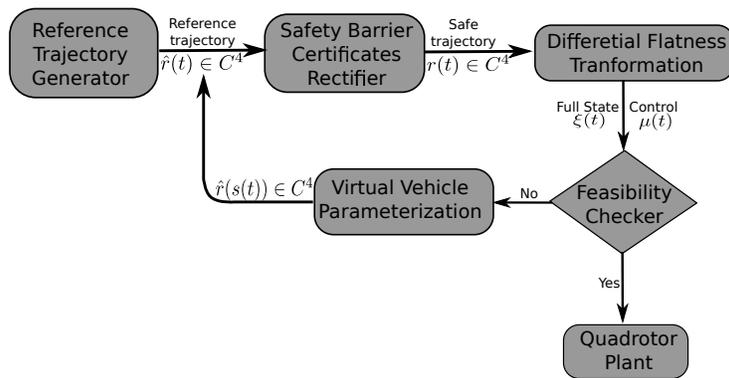


Fig. 5: Flowchart of safe trajectory generation strategy.

A. Proof of Existence of Solution

The following theorem guarantees that a feasible safe solution to the QP problem (13) always exists.

Theorem 5.1: Given a team of quadrotors indexed by \mathcal{M} with dynamics given in (7), the aggregate admissible safe control space K_{safe} in (11) allowed by Safety Barrier Certificates is guaranteed to be non-empty.

Proof: See [18]. ■

The idea of control sharing barrier function used in the proof is similar to control-sharing and merging control Lyapunov functions introduced in [5].

B. Virtual Vehicle Parameterization

Collision avoidance maneuvers of quadrotors might sometimes lead to significant deviations from reference trajectories. In this case, excessive control effort might be required for the quadrotors to return to the reference point along the nominal trajectory. To address this issue, a virtual vehicle parameterization method proposed in [4] is adopted.

The basic idea of virtual vehicle parameterization is to slow down or speed up the virtual vehicle (reference point $\hat{r}(t)$ on the nominal trajectory) as the tracking error $e_r = \|r - \hat{r}\|$ increases or decreases. In this particular application, we use the following virtual time variable to parameterize the reference point on the nominal trajectory

$$\dot{s} = e^{-k_s \|e_r\|^2}, \quad (14)$$

where k_s is the virtual parameterization gain. Instead of $\hat{r}(t)$, $\hat{r}(s(t))$ is fed into the *Safety Barrier Certificates* rectifier shown in Fig. 5. Intuitively, the virtual vehicle will slow down ($\dot{s} < 1$) when the tracking error is large; it will travel exactly at the desire speed ($\dot{s} = 1$) when the tracking error is zero. This parameterization mechanism is intended to reduce the amount of control effort when the quadrotor has to deviate away from the virtual vehicle to avoid collisions.

To demonstrate the effectiveness of virtual vehicle parameterization, a simulation of two quadrotors flying pass each other is presented. In this example, the collision avoidance maneuver requires a maximum pitch angle of 70° and a maximum thrust of 2.8 times hovering thrust without

parameterization ($k_s = 0$) as shown in Fig. 4. In contrast, a maximum pitch angle of 25° and a maximum thrust of 1.2 times hovering thrust are needed with parameterization ($k_s = 100$). In both cases, the desired task is accomplished within 6s.

Combined with the feasibility result in section V-A, the parameterization mechanism will always generate a feasible trajectory that satisfies given actuator constraints.

C. Overview of Safe Trajectory Generation Strategy

An overview of the safe trajectory generation strategy is summarized in Fig. 5. A smooth reference trajectory $\hat{r}(t) \in C^4$ is first fed into the safety barrier certificates rectifier, where the QP controller (13) is used to enforce collision-free flight maneuvers. The rectified smooth safe trajectory $r(t) \in C^4$ is then transformed into quadrotor states and controls using the differential flatness property. The full states and controls are checked to ensure that actuator limits are not violated. Otherwise, the reference trajectory $\hat{r}(s(t)) \in C^4$ is parameterized and fed into the safety barrier certificates rectifier again. This process can be repeated until the virtual vehicle parameterization strategy yields appropriate flight trajectory that respects both safety and actuator constraints. In the end, the generated feasible safe trajectory is sent to execute on the team of quadrotors.

VI. EXPERIMENT

The *Safety Barrier Certificates* are implemented on a team of five palm-sized quadrotors (Crazyflie 2.0). All communication channels between different devices and control programs are coordinated by a ROS server. The real-time positions and Euler angles of quadrotors are tracked by the Optitrack motion capture system with an update rate of 50Hz. The 50Hz quadrotor motion controller is developed based on the ROS driver for Crazyflie 2.0 built by ACTLab at USC [7]. To ensure stable trajectory tracking behavior, Euler angles and Euler angle rates generated with the differential flatness property are sent to quadrotors as control commands. The overall quadrotor control diagram is shown in Fig. 6.

During the experiment, quadrotor Q_5 is commanded to fly through a spinning formation as illustrated in Fig. 7.

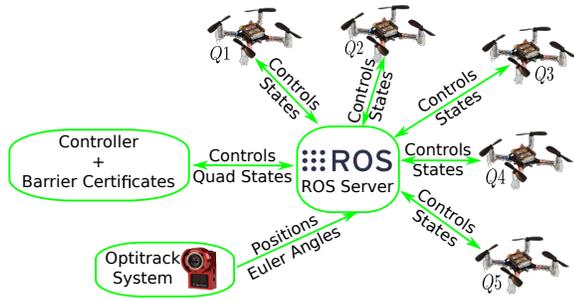


Fig. 6: Quadrotor control system diagram

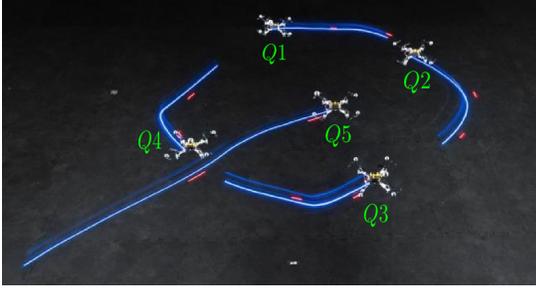


Fig. 7: Long exposure photo of the experiment of quad Q_5 flying through a spinning formation of four quads $Q_1 - Q_4$. The traces of light illustrate trajectories of quadrotors. A video of this experiment is available online [15].

The reference trajectories of quadrotors $Q_1 - Q_4$ are

$$\hat{r}_1(t) = \begin{bmatrix} 0.45 \sin(\frac{\pi}{2}t - \frac{\pi}{2}) \\ 0.45 \cos(\frac{\pi}{2}t - \frac{\pi}{2}) \\ -0.8 \end{bmatrix}, \hat{r}_2(t) = \begin{bmatrix} 0.45 \cos(\frac{\pi}{2}t) \\ 0.45 \sin(\frac{\pi}{2}t) \\ -0.8 \end{bmatrix},$$

$$\hat{r}_3(t) = \begin{bmatrix} 0.45 \cos(\frac{\pi}{2}t + \frac{\pi}{2}) \\ 0.45 \sin(\frac{\pi}{2}t + \frac{\pi}{2}) \\ -0.8 \end{bmatrix}, \hat{r}_4(t) = \begin{bmatrix} 0.45 \cos(\frac{\pi}{2}t + \pi) \\ 0.45 \sin(\frac{\pi}{2}t + \pi) \\ -0.8 \end{bmatrix}.$$

Another quadrotor Q_5 is designed to go from $p_0 = [-0.9, 0.9, 0.8]^T$ to $p_1 = [0.9, 0.9, 0.8]^T$. The nominal trajectory can be generated as,

$$\hat{r}_5(t) = \text{BezierInterp}(p_0, p_1),$$

where the BezierInterp function stands for the Bezier curve interpolation between two waypoints.

The safety distance between quadrotors is specified as $D_s = 25\text{cm}$ to account for the tracking frames and controller tracking errors. During the experiment, the *Safety Barrier Certificates* are applied to modify the nominal trajectories in a minimally invasive way to avoid collisions. As shown in Fig. 7, Q_5 successfully navigated through the spinning formation with minimal impact on the other four quadrotors.

VII. CONCLUSIONS

A flight trajectory modification strategy is presented in this paper to ensure collision-free maneuvers for teams of differential flatness based quadrotors. To do this, nominal flight trajectories, which are generated with existing control and planning algorithms, are modified in a minimally invasive

way using the *Safety Barrier Certificates* to avoid collisions. The proof of existence of feasible controller and virtual vehicle parameterization method to accommodate actuator limits are presented. In the end, experimental implementation of the *Safety Barrier Certificates* on a team of five quadrotors validates the effectiveness of the proposed strategy.

REFERENCES

- [1] Bitcraze AB. <https://www.bitcraze.io/>.
- [2] A. D. Ames, J. W. Grizzle, and P. Tabuada. Control Barrier Function Based Quadratic Programs with Application to Adaptive Cruise Control. In *Decision and Control (CDC), 2014 IEEE 53rd Annual Conference on*, pages 6271–6278, Dec 2014.
- [3] A. H. Barr. Superquadrics and angle-preserving transformations. *IEEE Computer graphics and Applications*, 1(1):11–23, 1981.
- [4] M. Egerstedt, X. Hu, and A. Stotsky. Control of mobile platforms using a virtual vehicle approach. *IEEE Transactions on Automatic Control*, 46(11):1777–1782, 2001.
- [5] S. Grammatico, F. Blanchini, and A. Caiti. Control-sharing and merging control lyapunov functions. *IEEE Transactions on Automatic Control*, 59(1):107–119, 2014.
- [6] M. Hehn and R. DAndrea. Real-time trajectory generation for quadcopters. *IEEE Transactions on Robotics*, 31(4):877–892, 2015.
- [7] W. Hoenig, C. Milanés, L. Scaria, T. Phan, M. Bolas, and N. Ayanian. Mixed reality for robotics. In *IEEE/RSJ Intl Conf. Intelligent Robots and Systems*, pages 5382 – 5387, Hamburg, Germany, Sept 2015.
- [8] H. K. Khalil. *Nonlinear systems*. Prentice hall, third edition, 2002.
- [9] Y. Kuriki and T. Namerikawa. Consensus-based cooperative formation control with collision avoidance for a multi-uav system. In *2014 American Control Conference*, pages 2077–2082. IEEE, 2014.
- [10] B. Landry. Planning and control for quadrotor flight through cluttered environments. Master's thesis, Massachusetts Institute of Technology, 2015.
- [11] D. Mellinger and V. Kumar. Minimum snap trajectory generation and control for quadrotors. In *Robotics and Automation (ICRA), 2011 IEEE International Conference on*, pages 2520–2525. IEEE, 2011.
- [12] D. Mellinger, A. Kushleyev, and V. Kumar. Mixed-integer quadratic program trajectory generation for heterogeneous quadrotor teams. In *Robotics and Automation (ICRA), 2012 IEEE International Conference on*, pages 477–483. IEEE, 2012.
- [13] B. Morris, M. J. Powell, and A. D. Ames. Sufficient conditions for the lipschitz continuity of qp-based multi-objective control of humanoid robots. In *52nd IEEE Conference on Decision and Control*, pages 2920–2926. IEEE, 2013.
- [14] Q. Nguyen and K. Sreenath. Exponential control barrier functions for enforcing high relative-degree safety-critical constraints. In *2016 American Control Conference (ACC)*, pages 322–328. IEEE, 2016.
- [15] Online. Barrier certificates for safe quad swarm. <https://www.youtube.com/watch?v=rK9oyqccMJw>, 2016.
- [16] L. Wang, A. D. Ames, and M. Egerstedt. Multi-objective compositions for collision-free connectivity maintenance in teams of mobile robots. In *Decisions and Control Conference*, pages 2659–2664, 2016.
- [17] L. Wang, A. D. Ames, and M. Egerstedt. Safety Barrier Certificates for Heterogeneous Multi-robot Systems. In *2016 American Control Conference (ACC)*, pages 5213–5218, July 2016.
- [18] L. Wang, A. D. Ames, and M. Egerstedt. Safe certificate-based maneuvers for teams of quadrotors using differential flatness. *arXiv preprint arXiv:1702.01075*, 2017.
- [19] G. Wu and K. Sreenath. Safety-critical control of a planar quadrotor. In *2016 American Control Conference (ACC)*, pages 2252–2258. IEEE, 2016.
- [20] G. Wu and K. Sreenath. Safety-critical control of a 3d quadrotor with range-limited sensing. In *ASME Dynamics Systems and Control Conference (DSCC)*, to appear, 2016.
- [21] X. Xu, P. Tabuada, J. W. Grizzle, and A. D. Ames. Robustness of control barrier functions for safety critical control. In *Analysis and Design of Hybrid Systems, 2015 IFAC Conference on*. IEEE, Oct 2015.
- [22] C. Zhang and J. M. Kovacs. The application of small unmanned aerial systems for precision agriculture: a review. *Precision agriculture*, 13(6):693–712, 2012.
- [23] D. Zhou and M. Schwager. Vector field following for quadrotors using differential flatness. In *2014 IEEE International Conference on Robotics and Automation (ICRA)*, pages 6567–6572. IEEE, 2014.